

# DT-400BAH-OS

## OPTI-SERVE SERIES

### SANITARY CUBELET ICE MACHINE/DISPENSER

Item # \_\_\_\_\_

Project: \_\_\_\_\_

Qty: \_\_\_\_\_

\*AutoCad available on KCL

DT-400BAH-OS

4/08

Item # 13198


#### DIMENSIONS

W x D x H

#### DT-400BAH-OS

21 x 22<sup>1/2</sup> x 72<sup>1/2</sup>\*

\*with 6" legs





DT-400

#### DT-400BAH-OS

Air-Cooled  
Shown



#### DT-400BAH-OS

- CleanCycle 12® - Every 12 hours, unit performs 15 minute purge to rid itself of impurities 
- LED Remote sensor for hands-free operation
- Sealed LED housing prevents moisture from entering, eliminating the possibility of an electrical short
- Corrosion resistant stainless steel exterior
- Up to 409 lbs. of ice production per 24 hours, with 40 lbs. built-in storage
- Easy to chew, cubelet ice
- Self contained design reducing opportunities for cross contamination
- Dispenses ice and water
- Removable air filters (Air-cooled model only)
- Protected by HoshiGuard Antimicrobial Agent 



#### Warranty

Valid in United States, Canada, Puerto Rico, & U.S. Territories. Contact factory for warranty in other countries.

**Two Year** - Parts & Labor on entire machine.

**Five Year** - Parts on: Compressor, air-cooled condenser.



# DT-400BAH-OS SANITARY CUBELET ICE MACHINE/DISPENSER - OPTI-SERVE SERIES

## DIMENSIONS W x D x H

**DT-400BAH-OS**  
21 x 22<sup>1/2</sup> x 72<sup>1/2</sup>

- Hands-free ice machine/dispenser

### AIR-COOLED

Water Temp° F.	50°	70°	90°
Air Temp° F. 70°	409	388	370
80°	354	338	322
90°	308	296	281




### UTILITY CONSUMPTION

Model Number	KWH per 100 LBS.		Potable Water Gal. per 100 lbs.	
	90/70	70/50	90/70	70/50
DT-400BAH-OS	7.6	5.2	12.0	12.0

### SPECIFICATIONS

Model Number	Condenser	Amperage	Min. Circuit Ampacity	Shipping Weight
DT-400BAH-OS	Air-Cooled	11.5	N/A	308 lbs.

### CUBELET DIMENSIONS

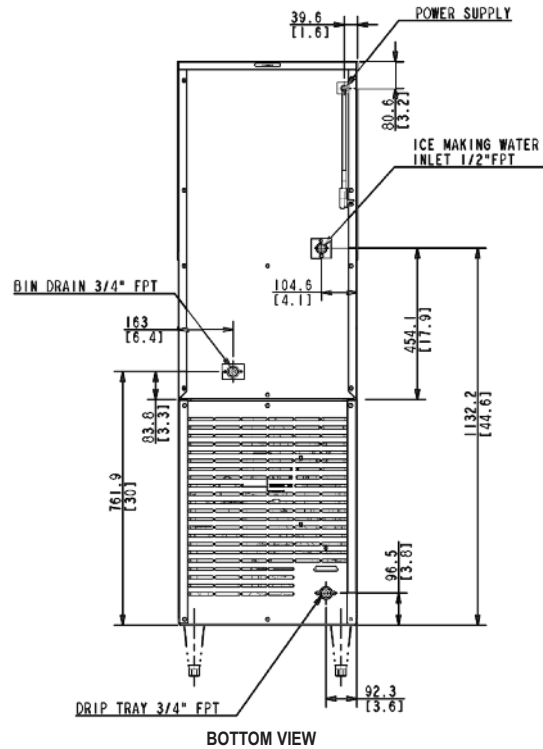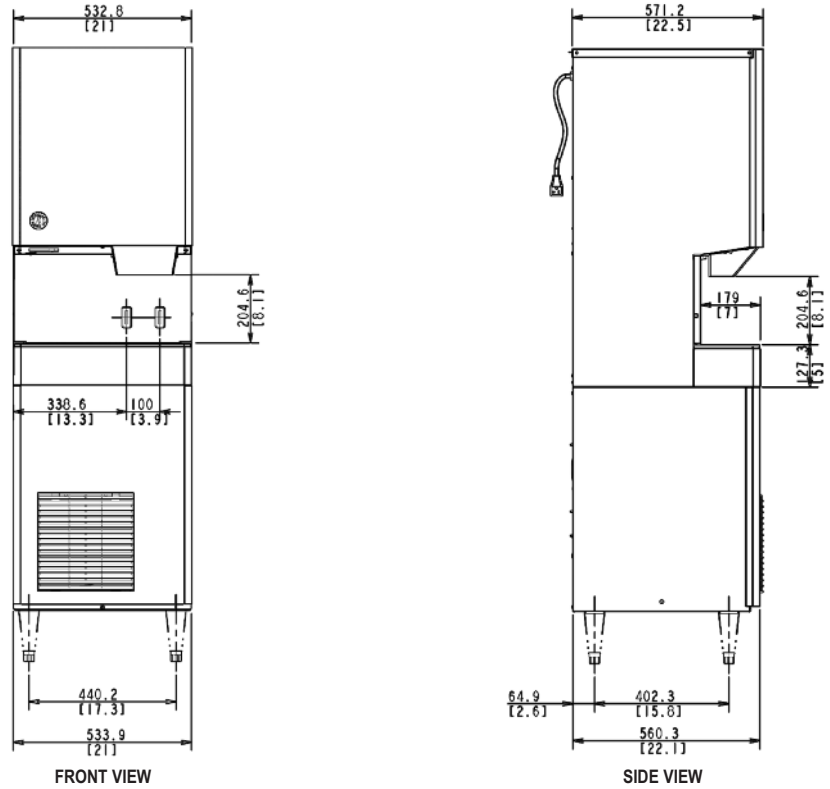

### ELECTRICAL & PLUMBING/DT-400BAH-OS

- 115V/60/1
- 1/2" OD copper or equivalent independent water supply
- 3/4" independent drain connection

### OPERATING LIMITS

- Ambient Temp Range 45 - 100°F
- Water Temp Range 45 - 90°F
- Water Pressure 10 - 113psig
- Voltage Range 104 - 127V

### SERVICE

- Panels easily removed and all components accessible for service.
- Removable/cleanable air filter.



© HOSHIZAKI AMERICA, INC.

618 Hwy. 74 S., Peachtree City, GA 30269

TEL 1-800-438-6087

FAX 1-800-345-1325

www.hoshizaki.com

Printed in U.S.A.

