

KM-320/515MAH-E

SLIM-LINE MODULAR CRESCENT CUBER

Item # _____

Project: _____

Qty: _____

*AutoCad available on KCL

KM-320/515MAH-E


8/08

Item # 13125


CUBER DIMENSIONS

W x D x H


KM-320/515MAH-E
56 x 69.5 x 77cm



KM-320/B-300



KM-320/B-500




KM-320/B-700




KM-515/B-300




KM-515/B-500



KM-515/B-700



KM-515/B-800



KM-515/B-900

Also available on Large Bins:
B-1150SS
B-1300SS



KM-320MAH-E

Air-Cooled
Shown

KM-515MAH-E

Air-Cooled




KM-320MAH-E

- Up to 133 kgs. of ice production per 24 hours

KM-515MAH-E

- Up to 233 kgs. of ice production per 24 hours
- Mount two units side by side for 466 kgs. per 24 hours

KM-320MAH-E & KM-515MAH-E

- Durable stainless steel exterior
- Individual crescent cube
- Protected by *HoshiGuard* Antimicrobial Agent 
- CycleSaver® Design 
- EverCheck® alert system 
- Stainless steel evaporator
- Removable air filters
- R-404A Refrigerant



Warranty

Contact factory for warranty information.



Hoshizaki

KM-320/515MAH-E SLIM-LINE MODULAR CRESCENT CUBER

DIMENSIONS
W x D x H
KM-320/515MAH-E
56 x 69.5 x 77cm

• Air-cooled

AIR-COOLED - KM-320MAH-E

| Water Temp° C. | 10° | 21° | 32° | |
|----------------|-----|-----|------------|-----|
| Air Temp° C. | 21° | 133 | 125 | 116 |
| | 27° | 127 | 114 | 106 |
| | 32° | 125 | 105 | 97 |

AIR-COOLED - KM-515MAH-E

| Water Temp° C. | 10° | 21° | 32° | |
|----------------|-----|-----|------------|-----|
| Air Temp° C. | 21° | 233 | 219 | 200 |
| | 27° | 222 | 200 | 182 |
| | 32° | 219 | 185 | 166 |

UTILITY CONSUMPTION at 32°C A/ 21°C W


| Model Number | Ice Production Per Cycle | | KWH per 45 Kgs. | Potable Water Liters per 45 kgs. | Condenser Water Liters per 45 kgs. |
|--------------|--------------------------|-------|-----------------|----------------------------------|------------------------------------|
| | Kgs. | Cubes | | | |
| KM-320MAH-E | 3.6 | 360 | 7.3 | 84.0 | N/A |
| KM-515MAH-E | 4.6 | 480 | 7.1 | 100.3 | N/A |

SPECIFICATIONS


| Model Number | Condenser | Amperage | Min. Circuit Ampacity | Shipping Weight |
|--------------|------------|----------|-----------------------|-----------------|
| KM-320MAH-E | Air-Cooled | 3.5 | 15 A | 79 kgs. |
| KM-515MAH-E | Air-Cooled | 7.14 | 15 A | 79 kgs. |

STORAGE BINS


| Model Number | Application Capacity |
|--------------|----------------------|
| B-300 | 136 kgs. |
| B-500 | 227 kgs. |
| B-700 | 318 kgs. |
| B-800 | 363 kgs. |
| B-900 | 409 kgs. |
| B-1150 | 522 kgs. |
| B-1300 | 578 kgs. |




KM-320 FRONT VIEW

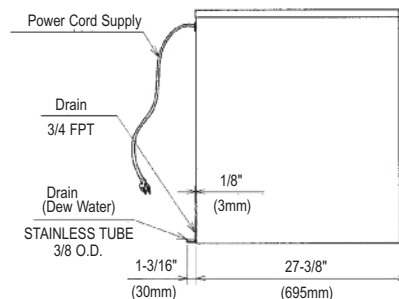


KM-320 SIDE VIEW



KM-320/515 ICE DROP ZONE

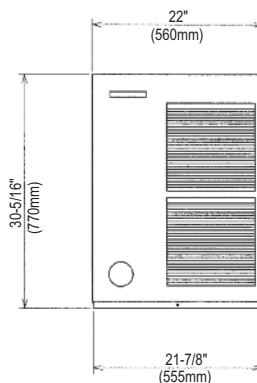

KM-515 FRONT VIEW

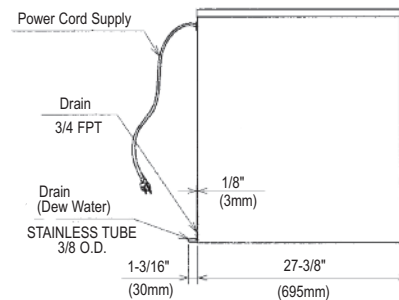

KM-515 SIDE VIEW

ELECTRICAL & PLUMBING/KM-320/515MAH-E

- 220-240/50/1
- 15 Amp Max Fuse
- 0.95cm OD copper or equivalent independent potable water supply
- 3/4" FPT independent drain connection

OPERATING LIMITS

- Ambient Temp Range 7 - 38°C
- Water Temp Range 7 - 32°C
- Water Pressure 0.7 - 8 kg/cm²
- Voltage Range 198 - 254V

SERVICE

- Panels easily removed and all components accessible for service.
- Removable/cleanable air filters



© HOSHIZAKI AMERICA, INC.

618 Hwy. 74 S., Peachtree City, GA 30269

TEL 1-800-438-6087

FAX 1-800-345-1325

www.hoshizaki.com

Printed in U.S.A.

